





Tread Compound Improvement

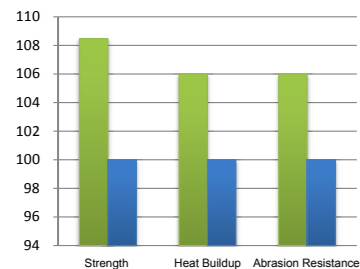

■ This Product ■ Conventional Products

Specially designed pattern for commercial light trucks, minivans, and minibuses that offers outstanding handling on wet surfaces as well as excellent high speed durability.

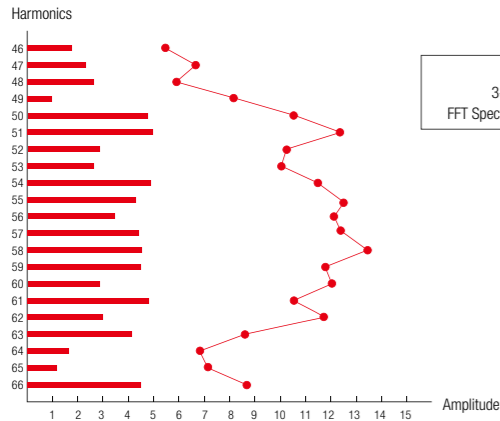


■ Tread Pattern

Original pattern design ensures excellent performance and greater driving comfort on wet and dry roads.


■ Driving Comfort

The tread has a varied pitch design created to reduce noise and allow for a better driving experience.



High strength (Puncture and Scratch Resistant)

+



High wear resistance and high braking performance

Use of specialized rubber compounds achieves a balance of strength and braking performance.

SUMMER

WINTER

ALL SEASON

■ Tread Design

Wider and deeper grooves increase wear resistance, efficiently drain water, and provide greater handling and stability.


■ Tire Structure

The reinforced carcass allows for greater load bearing capabilities.



Contour Design

The new tire profile improves contact shape for a strengthened carcass. This strengthened carcass then provides improved carrying capacity.



- Nylon cap strips wound in the belt cover the entire shoulder for improved durability to resist irregular wear.
- Strengthened double carcass design improve the sidewall's impact resistance.
- Sturdy bead apex structure and design support the tire load to improve braking.

RIM	SIZE		LI/SS	T.D.	STANDARD RIM	S.W.	O.D.	MAX.LOAD	MAX.PRESSURE	SIDEWALL
				mm	inch	mm	mm	KG	kPa	
12	145R12C	6PR	80/78P	8	4.00B	145	537	450/425	350	BSW
12	145R12C	8PR	86/84P	8	4.00B	145	537	530/500	450	BSW
12	155R12C	6PR	83/81P	8	4.50B	157	550	487/462	350	BSW
12	155R12C	8PR	88/86P	8	4.50B	157	550	560/530	450	BSW
13	155R13C	6PR	85/83Q	8	4.50B	157	578	515/487	350	BSW
13	165/70R13C	6PR	88/86Q	8	5.00B	170	562	560/530	375	BSW
13	165R13C	8PR	94/93S	7.6	4.50B	167	596	670/650	450	BSW
13	175R13C	8PR	97/95S	8	5.00B	177	610	730/690	450	BSW

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs XL Extra Load LI Load Index SS Speed Symbol

RXQUEST

CO2

SUMMER-LTC



WEAR RESISTANCE



HANDLING



PUNCTURE RESISTANT



RESILIENT

RIM	SIZE		LI/SS	T.D.	STANDARD RIM	S.W.	O.D.	MAX.LOAD	MAX.PRESSURE	SIDEWALL
				mm	inch	mm	mm	KG	kPa	
14	175/65R14C	6PR	90/88T	8	5J	177	584	600/560	375	BSW
14	175/70R14C	6PR	95/93Q	8	5J	177	602	690/650	375	BSW
14	175R14C	8PR	99/98Q	9	5J	178	634	775/750	450	BSW
14	185R14C	8PR	102/100Q	9	5 1/2J	188	650	850/800	450	BSW
14	195R14C	8PR	106/104Q	9	5 1/2J	198	666	950/900	450	BSW
14	195R14C	8PR	106/104Q	9	5 1/2J	198	666	950/900	450	WR
14	205/75R14C	8PR	109/107Q	9	5 1/2J	203	664	1030/975	475	WR
14	205R14C	8PR	109/107R	9	6J	208	686	1030/975	450	BSW
15	185R15C	8PR	103/102R	9.4	5 1/2J	188	674	875/850	450	BSW
15	195/70R15C	10PR	104/102R	10	6J	201	655	900/850	450	BSW
15	195R15C	8PR	106/104R	9	5 1/2J	198	690	950/900	450	BSW
15	195R15C	8PR	106/104R	9	5 1/2J	198	690	950/900	450	WR
15	205/65R15C	6PR	102/100R	9	6J	209	647	850/800	375	BSW
15	205/70R15C	8PR	106/104R	9	6J	209	669	950/900	450	BSW
15	215/70R15C	8PR	109/107S	10	6 1/2J	221	683	1030/975	450	BSW
15	215R15C	8PR	109/107R	10	6J	218	725	1030/975	450	WR
15	225/70R15C	8PR	112/110R	9	6 1/2J	228	697	1120/1060	450	BSW
16	175R16C	8PR	101/99R	9	5J	178	684	825/775	450	BSW
16	185/75R16C	8PR	104/102R	9	5J	184	684	900/850	475	BSW
16	195/60R16C	6PR	99/97T	9	6J	201	640	775/730	375	BSW
16	195/65R16C	10PR	104/102R	9.4	6J	201	660	900/850	475	BSW
16	195/75R16C	8PR	107/105R	10	5 1/2J	196	698	975/925	475	BSW
16	205/65R16C	8PR	107/105R	9	6J	209	672	975/925	475	BSW
16	205/75R16C	8PR	110/108R	9	5 1/2J	203	714	1060/1000	475	BSW
16	205R16C	8PR	110/108R	9	6J	208	736	1060/1000	450	BSW
16	215/60R16C	6PR	103/101T	9	6 1/2J	221	664	875/825	375	BSW
16	215/65R16C	8PR	109/107R	9	6 1/2J	221	686	1030/975	475	BSW
16	215/70R16C	6PR	108/106Q	9	6 1/2J	221	708	1000/950	375	BSW
16	215/75R16C	10PR	116/114R	10.5	6J	216	728	1250/1180	525	BSW
16	225/65R16C	8PR	112/110R	9	6 1/2J	228	698	1120/1060	475	BSW
16	225/75R16C	10PR	121/120R	9	6J	223	744	1450/1400	575	BSW
16	235/65R16C	8PR	115/113R	9	7J	240	712	1215/1150	475	BSW
16	235/65R16C	10PR	121/119R	9	7J	240	712	1450/1360	575	BSW
16	285/65R16C	8PR	125R	9	8 1/2J	292	776	1650	475	BSW
16	285/65R16C	10PR	128R	9	8 1/2J	292	776	1800	525	BSW
17	225/70R17C	6PR	112/110R	9	6 1/2J	228	748	1120/1060	375	BSW

1inch=25.4mm	1kPa=0.142psi	1KG=2.2 lbs	WR White Ring	LI Load Index	SS Speed Symbol
BSW Black Sidewall					