


HP H11



The specially formulated compounds are **ECO FRIENDLY**, highly fuel efficient and long lasting.

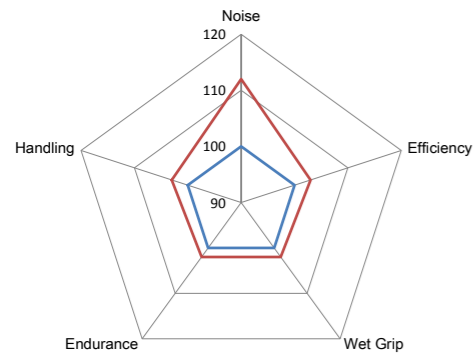

HP H11 (Red line) EXISTING PRODUCT (Blue line)



■ Shoulder Designed

The closed shoulder design strengthens shoulder blocks for superior handling performance.



■ Wet Performance

The three wide tread grooves and wave-like sipes efficiently drain water to improve grip on wet roads and improve driving safety.

■ Handling

A pair of center ribs and the solid shoulder blocks maintain stable contact with the road to ensure great handling.

| RIM | SIZE | LI/SS | | T.D. | STANDARD RIM | S.W. | O.D. | MAX.LOAD | MAX.PRESSURE | UTQG | SIDEWALL |
|-----|-----------|-------|----|------|--------------|------|------|----------|--------------|---------|----------|
| | | | | mm | inch | mm | mm | KG | kPa | | |
| 13 | 145/70R13 | 71T | -- | 7 | 4.50B | 150 | 534 | 345 | 300 | 360/A/A | BSW |
| 13 | 145/80R13 | 75T | -- | 7 | 4.00B | 145 | 562 | 387 | 300 | 360/A/A | BSW |
| 13 | 155/65R13 | 73T | -- | 7.3 | 4.50B | 157 | 532 | 365 | 300 | 360/A/A | BSW |
| 13 | 155/70R13 | 75T | -- | 7 | 4.50B | 157 | 548 | 387 | 300 | 360/A/A | BSW |
| 13 | 155/80R13 | 79T | -- | 7 | 4.50B | 157 | 578 | 437 | 300 | 360/A/A | BSW |
| 13 | 165/65R13 | 77T | -- | 7.2 | 5.00B | 170 | 544 | 412 | 300 | 360/A/A | BSW |
| 13 | 165/70R13 | 79T | -- | 7.2 | 5.00B | 170 | 562 | 437 | 300 | 360/A/A | BSW |
| 13 | 165/70R13 | 83T | XL | 7.2 | 5.00B | 170 | 562 | 487 | 340 | 360/A/A | BSW |
| 13 | 165/80R13 | 83T | -- | 7.2 | 4.50B | 165 | 594 | 487 | 300 | 360/A/A | BSW |
| 13 | 175/70R13 | 82T | -- | 7.2 | 5.00B | 177 | 576 | 475 | 300 | 360/A/A | BSW |
| 13 | 185/70R13 | 86T | -- | 7.4 | 5.50B | 189 | 590 | 530 | 300 | 360/A/A | BSW |
| 14 | 155/65R14 | 75T | -- | 7 | 4 1/2J | 157 | 558 | 387 | 300 | 360/A/A | BSW |
| 14 | 165/60R14 | 75H | -- | 7.2 | 5J | 170 | 554 | 387 | 300 | 360/A/A | BSW |
| 14 | 165/65R14 | 79T | -- | 7.2 | 5J | 170 | 570 | 437 | 300 | 360/A/A | BSW |
| 14 | 165/70R14 | 81T | -- | 7.2 | 5J | 170 | 588 | 462 | 300 | 360/A/A | BSW |
| 14 | 165/70R14 | 85T | XL | 7.2 | 5J | 170 | 588 | 515 | 340 | 360/A/A | BSW |
| 14 | 165/80R14 | 85T | -- | 7.2 | 4 1/2J | 165 | 620 | 515 | 300 | 360/A/A | BSW |
| 14 | 175/65R14 | 82T | -- | 7.2 | 5J | 177 | 584 | 475 | 300 | 360/A/A | BSW |
| 14 | 175/65R14 | 86T | XL | 7.2 | 5J | 177 | 584 | 530 | 340 | 360/A/A | BSW |
| 14 | 175/70R14 | 84T | -- | 7.2 | 5J | 177 | 602 | 500 | 300 | 360/A/A | BSW |
| 14 | 175/70R14 | 88T | XL | 7.2 | 5J | 177 | 602 | 560 | 340 | 360/A/A | BSW |
| 14 | 185/60R14 | 82H | -- | 7.4 | 5 1/2J | 189 | 578 | 475 | 300 | 360/A/A | BSW |
| 14 | 185/65R14 | 86H | -- | 7.4 | 5 1/2J | 189 | 596 | 530 | 300 | 360/A/A | BSW |
| 14 | 185/70R14 | 88H | -- | 7.4 | 5 1/2J | 189 | 616 | 560 | 300 | 360/A/A | BSW |
| 14 | 185/70R14 | 88T | -- | 7.4 | 5 1/2J | 189 | 616 | 560 | 300 | 360/A/A | BSW |
| 14 | 195/60R14 | 86H | -- | 8 | 6J | 201 | 590 | 530 | 300 | 360/A/A | BSW |
| 14 | 195/65R14 | 89H | -- | 7.4 | 6J | 201 | 610 | 580 | 300 | 360/A/A | BSW |
| 14 | 195/70R14 | 91T | -- | 7.4 | 6J | 201 | 630 | 615 | 300 | 360/A/A | BSW |

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs XL Extra Load LI Load Index SS Speed Symbol